



12/22/99

ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

Case Docket No. P7134-9043
Date December 22, 1999

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the patent application of:
Inventor(s): Masahiro HIGUCHI; Toshiyuki YARIMIZU; Shoji NEMOTO; Masahiro SHIBATA

For: CAM SLIDER AND A CAM UNIT USING THE SAME

☒ Specification (10 pages)☒ 5 sheets of drawings☒ Declaration and Power of Attorney☒ Return Receipt Postcard☒ An Assignment of the invention to Sankyo Oilless Industry, Inc. with PTO-1595☒ A filing fee, calculated as shown below:

	(Col. 1)	(Col. 2)
FOR: <input checked="" type="checkbox"/>	No. Filed	No. Extra
BASIC FEE		
TOTAL CLAIMS	2 - 20 =	* 0
INDEP CLAIMS	2 - 3 =	* 0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

Small Entity	
RATE	FEE
	\$380
x 9 =	
x 39 =	
+130 =	
TOTAL	

or

or

or

or

or

or

Other Than A Small Entity	
RATE	FEE
	\$760
x 18 =	0
x 78 =	0
+260 =	0
TOTAL	\$760

*If the difference in Col. 1 is less than zero,
enter "0" in Col. 2

A check in the amount of \$ 800.00 is enclosed to cover the filing fee and ☒ assignment recordation. The Commissioner is hereby authorized to charge payment for any additional filing fees associated with this communication or credit any overpayment to Deposit Account No. 14-1060.

Respectfully submitted,

NIKAIDO, MARMELSTEIN, MURRAY & ORAM LLP

Metropolitan Square
655 15th Street, N. W.
Suite 330 - G Street Lobby
Washington, D. C. 20005-5701
Tel: (202) 638-5000
Fax: (202) 638-4810
DTN/hk

By: David T. Nikaido
Reg. No. 22,663

Enclosures: Check #21789/Specification and Claims/Declaration
Drawings (5 sheets)/Assignment/PTO-1595 Form/Return Receipt Postcard

CAM SLIDER AND A CAM UNIT USING THE SAME

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

The present invention relates generally to a horizontal, suspension or inclined cam unit, which can be combined with a set of metal mold tools as used for example, in bending selected edges or ends of a car body frame, and particularly to a cam slider to
10 be used in such a cam unit.

2. Related Arts

A large-sized metal plate is formed into a desired car body shape by pressing the metal plate between a stationary metal mold
15 tool and a movable metal mold tool both aligned vertically. Referring to Fig.5, when it is desired that holes are made on selected sides of the pressed product or when it is desired that selected edges or ends of the pressed product are bent, a horizontal cam unit 1a is attached to the movable and stationary metal mold
20 tools 20 and 24 to effect a required machining on the pressed product. The horizontal cam unit 1a comprises a cam drive 21 and a cam slider 22. The cam drive 21 has an oblique surface 21a formed on its end, and the cam slider 22 has an oblique surface 22a, also. The cam drive 21 is fixed to the upper movable metal mold tool 20,
25 and the cam slider 22 is slidably fixed to the base 24 of the lower stationary metal mold tool with their oblique surfaces 21a and 22a laid on each other. The cam slider 22 has a machining tool 23 (for example, a drill) fixed to its vertical side.

In operation the movable metal mold tool 20 reciprocates up
30 and down to move the cam slider 22 right and left, thereby performing a required machining on the side surface of the pressed product.

The cam slider 22 is spring-biased leftward all the time by a resilient body 26 such as a spring mounted to a guide pin 26,

which is fixed to the stationary metal mold 24. Thus, the rising of the movable metal mold 20 and hence the cam drive 21 will permit the cam slider 22 to return to its original position.

Referring to Figs.6 and 7, a suspension cam unit comprises an upper cam holder 27, an intermediate cam slider 28 and a lower cam base 29, all of which are laid slidably on each other. The upper cam holder 27 is fixed to the upper movable metal mold tool, and can be raised and lowered vertically as indicated by a double-headed arrow S1. The raising and lowering of the upper cam holder 27 over the stroke S1 will cause the cam slider 28 to move different strokes S2 and S3 in predetermined directions as indicated by double-headed arrows S2 and S3. The lower cam base 29 is fixed to the stationary metal mold tool to allow the cam slider 28 to perform a required cam action.

In this example the cam holder 27 has a guide pin 31 fixed thereto whereas the cam slider 28 has a resilient member 30 contained in its recess. The resilient member 30 is supported by the guide pin 31 to apply a resilient force to the cam slider 28, thereby making the cam slider 28 to return to its original position after performing the required cam action.

As for the former horizontal cam unit of Fig.5 the spring 26 is fitted on the spring guide pin 26a which is fixed to the base 24 of the stationary metal mold tool, and the spring 26 abuts the vertical side of the cam slide 22 to apply its resilient force to the cam slider 22.

When it is required that a machining tool is positioned horizontally (0 degrees) or at an inclined angle of 10 or 15 degrees to meet occasional demands dependent on the particular shapes of car bodies, the base 24 of the stationary metal mold tool needs to be so modified as to position the spring guide pin 26a and the spring 26 at an oblique angle as desired.

The base 24 is massive, and it costs much to make and store a number of massive objects each permitting a selected machining tool to be attached at a desired oblique angle. A large warehouse

space is required for storing such massive articles. Also, it is necessary that guide pins 26a and springs 26 be kept in custody at a different place other than the warehouse in which the massive articles are stored. When used, a selected guide pin and associated spring need to be attached to the base 24 and the cam slider 22 in exactly correct positions. This requires a skilful and tedious work; if such resilient parts are fixed a minimum amount apart from the correct position, the cam slider cannot move smoothly.

The cam slider 22 has no resilient member equipped therewith for permitting it to automatically return to its original position, and therefore, such cam slider cannot be readily applied to a pressing metal mold tool for shaping car bodies or to any other inclined machining apparatus. Stated otherwise, such cam sliders are reserved for exclusive use, and therefore, they cannot be marketed as separate parts for non-exclusive use.

As for the latter suspension cam unit the cam holder 27 is designed to have a guide pin 31 fixed thereto, and therefore, the cam unit has same defects as described above.

SUMMARY OF THE INVENTION

One object of the present invention is to provide an improved cam unit which is free of such defects as described above.

To attain this object a cam slider in a cam unit to be fixed to a stationary metal mold tool and a movable metal mold tool for machining a pressed product, is improved according to the present invention in that the cam slider is equipped with a resilient member to allow the cam slider to return to its original position subsequent to the cam action and a counter member to the resilient member.

A cam unit to be fixed to a stationary metal mold tool and a movable metal mold tool for machining a pressed product, comprising a cam driver to be fixed to one of the metal mold tools, a cam slider laid on the cam driver to be driven in a predetermined

direction by the cam driver, and a cam holder laid on the cam slider to be fixed to the other metal mold tool, is improved according to the present invention in that the cam slider is equipped with a resilient member to allow the cam slider to return to its original position subsequent to the cam action and a counter member to the resilient member.

Thanks to its versatility a cam slider according to the present invention can be marketed as a separate part for non-exclusive use. The cam slider can be easily fixed to associated parts with bolts, provided that they have inclined surfaces to fit the cam slider, and that they have tapped holes for mounting the cam slider with bolts. A cam unit according to the present invention can be readily fixed to stationary and movable metal mold tools with bolts, provided that such metal mold tools have tapped holes for mounting the cam unit with bolts.

The cam slider is laid between the lower cam driver and the upper cam holder, and it suffices that these cam driver and cam holder are so made as to have oblique surfaces inclined to give a desired machining angle to the cam slider, and that holes are made in the cam driver and the cam holder for bolting to the upper movable and lower stationary metal mold tools, thus requiring no precision machining work in producing such parts. Therefore, these parts can be ordered to be made by outsider manufacturers.

This permits division of work, permitting separate parts to be made efficiently by different specialized workers. The cam holder has no guide pins for coiled springs and associated attachments, and accordingly it is simple in shape, small in size, and convenient for warehousing.

Other objects and advantages of the present invention will be understood from the following description of a cam unit according to one preferred embodiment of the present invention, which is shown in accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWING

Fig.1 is a perspective view of a cam unit according to the present invention;

Fig.2 is a front view of the cam unit;

Fig.3 is a perspective view of the cam slider;

5 Fig.4 is a perspective view of the cam slider, showing that the spring guide is apart from the cam slider;

Fig.5 illustrates, in section, a conventional horizontal cam unit in the state of being used;

10 Fig.6 is a front view of a conventional suspension cam unit; and

Fig.7 is a side view of the conventional suspension cam unit.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Referring to Figs.1 and 2, a cam unit 1 which is to be fixed
15 to a stationary metal mold tool 24 and a movable metal mold tool 20 for machining a pressed product, comprises a cam driver 4 to be fixed to the stationary metal mold tool 24, a cam slider 3 obliquely laid on the cam driver 4 to be driven in a predetermined direction by the cam driver 4, and a cam holder 2 laid on the cam
20 slider 3 to be fixed to the movable metal mold tool 20.

As seen from Fig.1, a base plate 5 is slidably sandwiched between the cam slider 3 and the cam holder 2. Specifically the base plate 5 is slidably mounted to the cam slider 3, and the base plate 5 is bolted to the cam holder 2 when the cam unit 1 is bolted
25 to the stationary and movable metal mold tools 24 and 20.

The cam holder 2 is fixed to the upper movable metal mold tool 20 by inserting bolts in holes "a", and the cam driver 4 is fixed to the lower stationary metal mold tool 24 by inserting bolts in holes "b".

30 Referring to Figs.3 and 4, the slider body 3a has a "V"-shaped slide surface 3d formed on its bottom side (see Fig.4), on which the slider body 3a can slidably move on the underlying cam drive 4. Also, the slider body 3a has a tool-attaching surface on its front side, and the bottom surface of the base plate 5 is

slidably laid on the top surface 3c of the slider body 3a.

The slider body 3a has forcedly returning followers 6 and 7 bolted to its opposite sides, thereby jerking the cam slider 3 toward the original position subsequent to the cam action.

5 As seen from Fig.4, the top surface 3c of the slider body 3a has holes 8 and 9 made in its center area for bolting a spring guide 10.

10 The cam slider 3 can be assembled by: putting the base plate 5 on the top surface 3c of the slider body 3a; inserting the longitudinal projection of the spring guide 10 in the center, longitudinal hole 5a of the base plate 5 until the longitudinal projection of the spring guide 10 has been put on the top surface 3c of the slider body 3a; and inserting bolts in the tapped holes 8 and 9 to fasten the spring guide 10 to the slider body 3a.

15 Thus, the base plate 5 is sandwiched between the top surface 3c of the slider body 3a and the spring guide 10, so that the base plate 5 is permitted to move slidably on the top surface 3c of the slider body 3a.

20 An upright guide pin block 11 is bolted to the front (left in Fig.4) end of the base plate 5. One end of a guide pin rod 12 abuts on the guide pin block 11.

25 A spring 13 and an annular washer 14 are attached to the guide rod 12, and these are fitted in the inner cavity 10a of the spring guide 10. The washer 14 is pushed against the inner wall of the "U"-shaped slot 10b of the spring guide 10.

30 The guide pin rod 12 extends through the U-shaped slot 10b of the spring guide 10, and the other end of the guide pin rod 12 abuts on an L-shaped piece 15, which is bolted to the top surface of the base plate 5. Finally the forcedly returning followers 6 and 7 are bolted to the opposite sides of the slider body 3a.

The cam slider 3 thus assembled permits the slider body 3a to return to its original position by the spring 13, which exerts a pushing force to the slider body 3a via the spring guide 10 and washer 14 as a counter action to the guide pin block 11.

As is apparent from the above, the cam slider 3 is equipped with the spring 13, which permits the cam slider body 3a to return to its original position subsequent to the cam action. The base plate 5 and guide pin block 11 as a counter part to the spring 13 is provided in the cam slider 3, and therefore, the so designed cam slider 3 can be handled as a separate, independent article to be stored and marketed.

The cam holder 2 and the cam drive 4 can be easily combined with the cam slider 3 simply by using bolts to provide a complete cam unit 1 as shown in Fig.1. All of the spring guide 10, guide pin block 11, guide pin rod 12, spring 13 and retainer piece 15 are confined within the inner cavity of the cam holder 2, and the bottom surface of the cam holder 2 is laid on the top surface of the base plate 5 in exact registration with the aid of square projections 5b (see Fig.3).

Cam holders 2 and cam drives 4 are made to have different oblique sides to meet occasional demands for different machining angles say 5, 10 or 20 degrees and for fitting on different types of metal mold tools.

Thus, a cam unit 1 can be built to be most appropriate for use in the metal mold tool combination by selecting appropriate ones among those different cam holders 2, cam drives 4 and cam sliders 3 and by bolting the so selected cam slider 3 to the so selected cam holder 2 and cam drive 4. Then, the so built cam unit 1 is set on the upper movable and lower stationary mold tools 20 and 24. The rising and lowering of the movable metal mold tool 20 causes the machining tool-bearing slider body 3a to move in a predetermined direction to effect a required machining on a semi-fabricated product. The rising of the movable metal mold tool permits the slider body 3a to return to its original position.

The cam slider 3 described above includes the return spring 13, the counter base plate 5, the spring guide 10 and the guide pin block 11 along with associated parts, such as the guide pin rod 12 and the retainer piece 15. The spring guide 10, the guide

pin block 11, the retainer piece 15 and other parts may be modified or replaced by some appropriate equivalents.


The cam slider is described as being used in a suspension cam unit, but it can be equally used in a horizontal or inclined
5 cam unit.

WHAT IS CLAIMED IS:

1. A cam slider in a cam unit to be fixed to a stationary metal mold tool and a movable metal mold tool for machining a pressed product, characterized in that the cam slider is equipped with a resilient member to allow the cam slider to return to its original position subsequent to the cam action and a counter member to the resilient member.
2. A cam unit to be fixed to a stationary metal mold tool and a movable metal mold tool for machining a pressed product, comprising a cam driver to be fixed to one of the metal mold tools, a cam slider laid on the cam driver to be driven in a predetermined direction by the cam driver, and a cam holder laid on the cam slider to be fixed to the other metal mold tool, characterized in that the cam slider is equipped with a resilient member to allow the cam slider to return to its original position subsequent to the cam action and a counter member to the resilient member.

ABSTRACT OF THE DISCLOSURE

Disclosed is an improved cam slider in a cam unit to be fixed to a stationary metal mold tool and a movable metal mold tool for machining a pressed product. The cam slider is equipped with a resilient member to allow the cam slider to return to its original position subsequent to the cam action and a counter member to the resilient member.

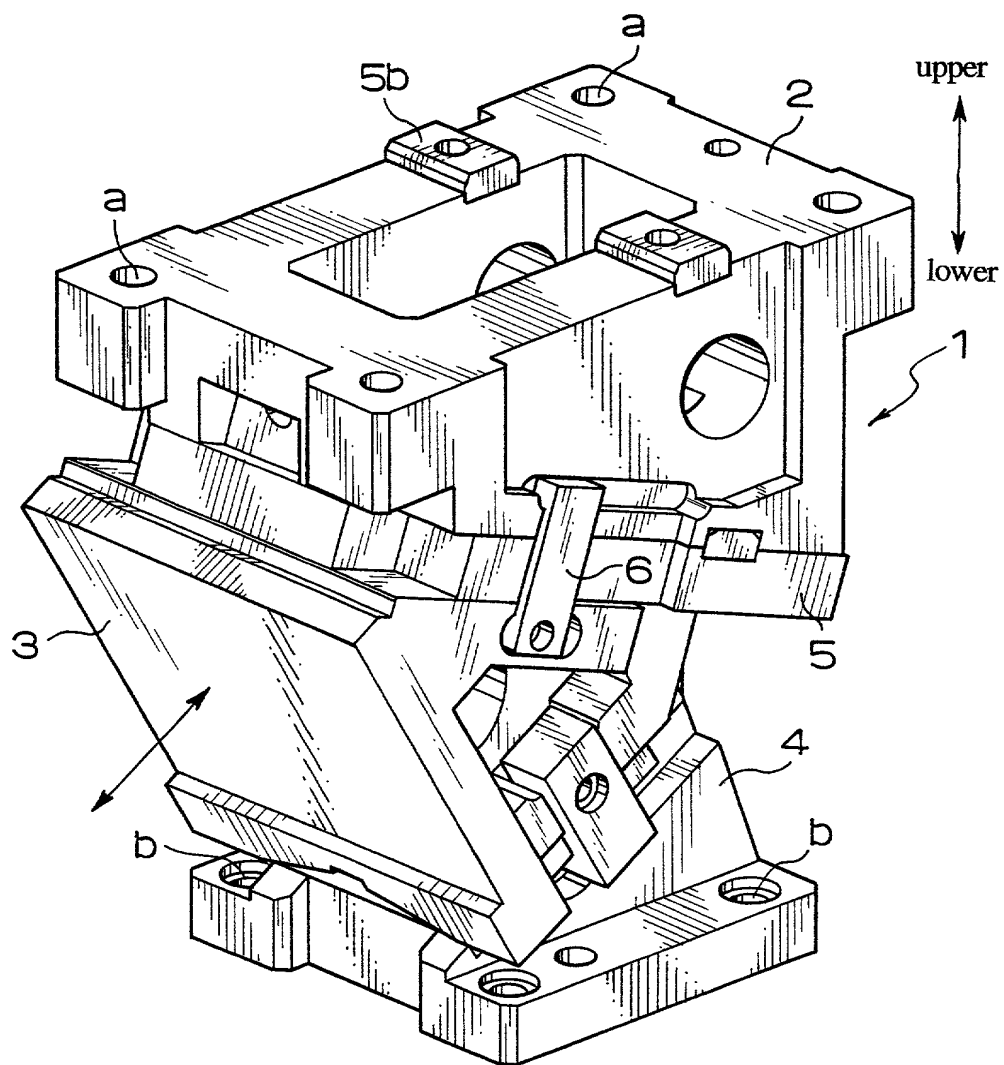[illegible]

(The following section contains a large number of small, illegible fragments of text, likely bleed-through from the reverse side of the page.)

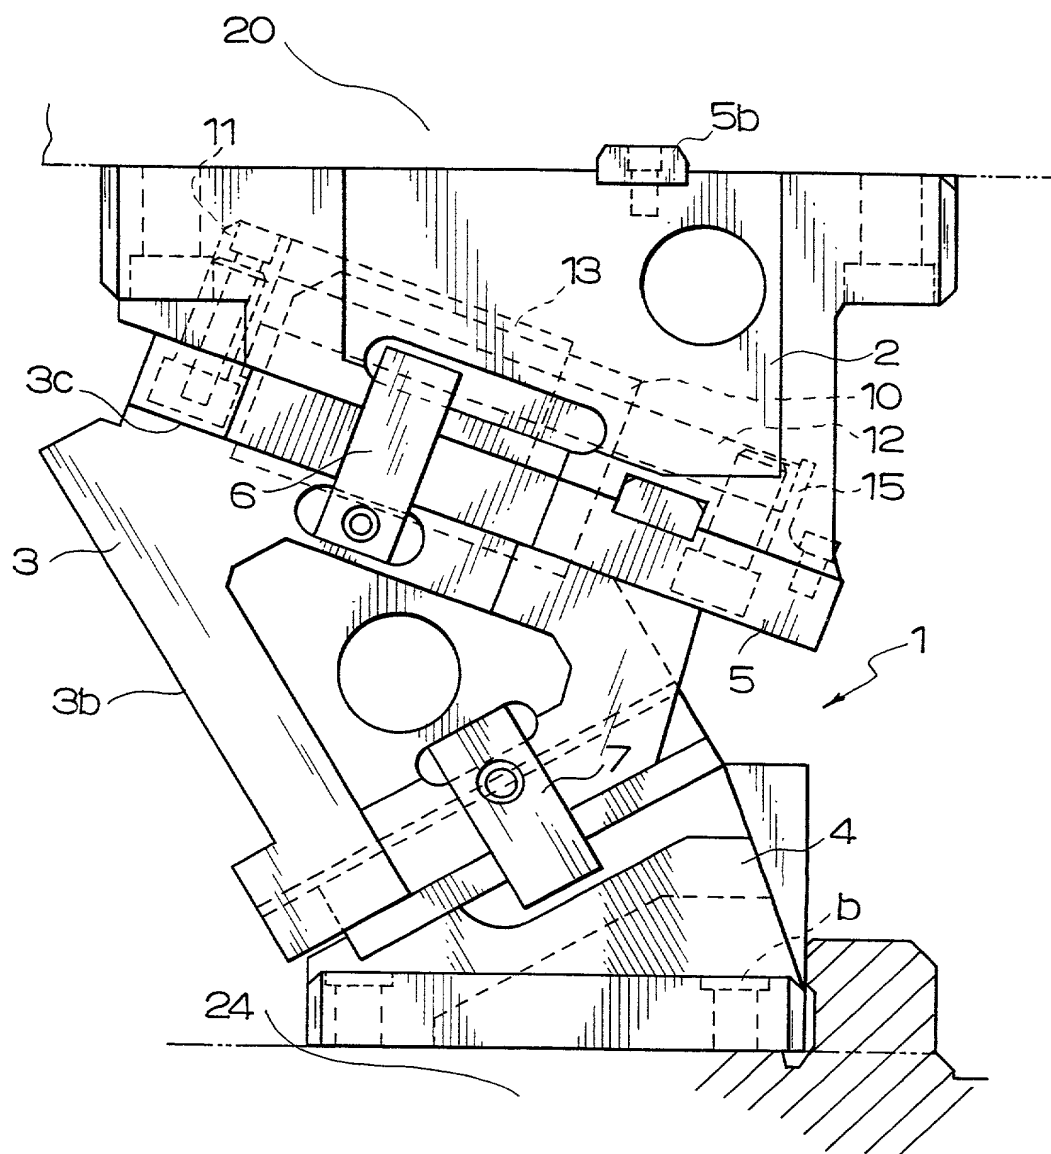


FIG. 3

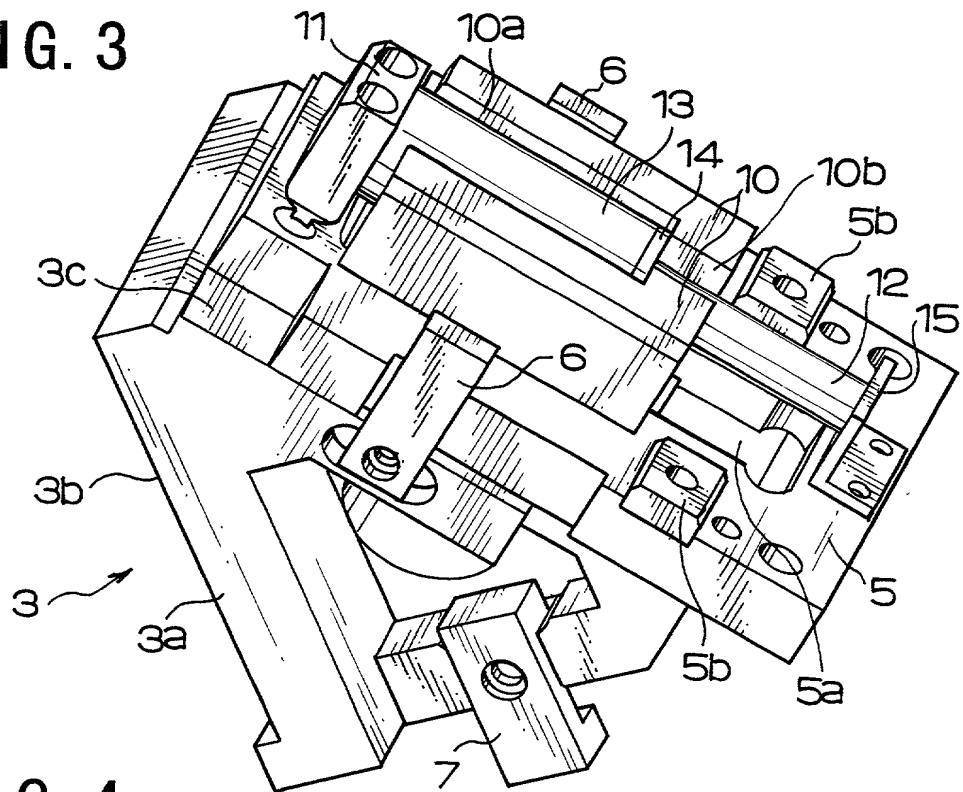


FIG. 4

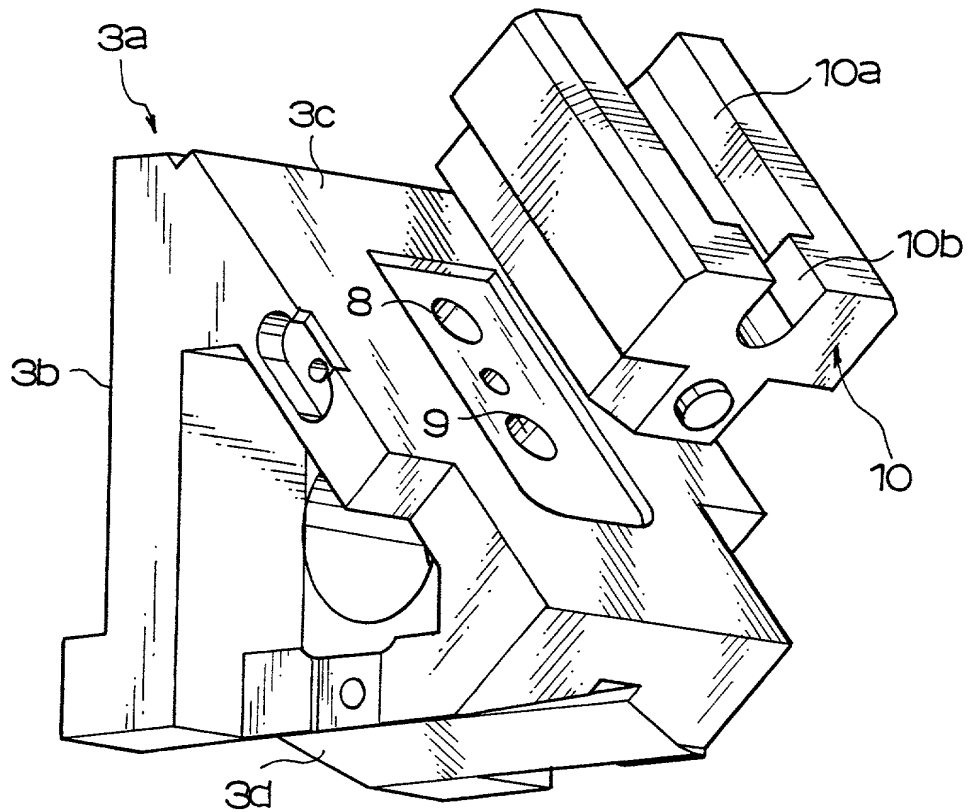


FIG. 5
PRIOR ART

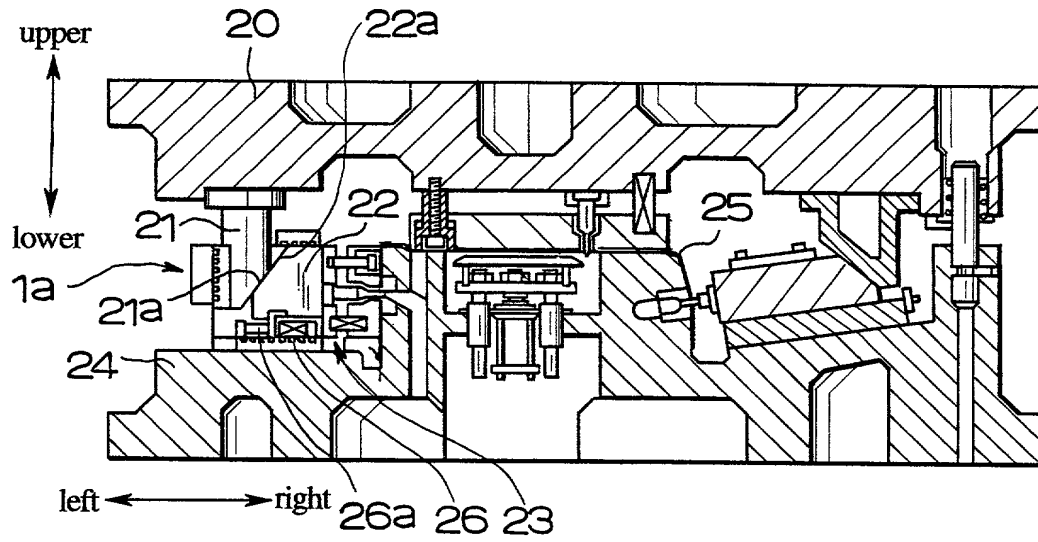


FIG. 6
PRIOR ART


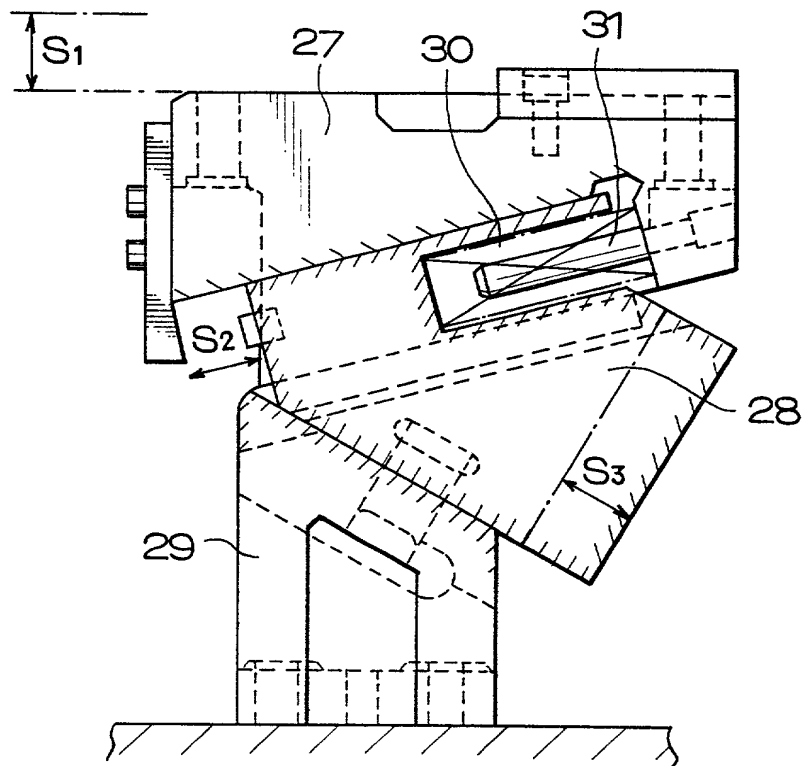


FIG. 7
PRIOR ART

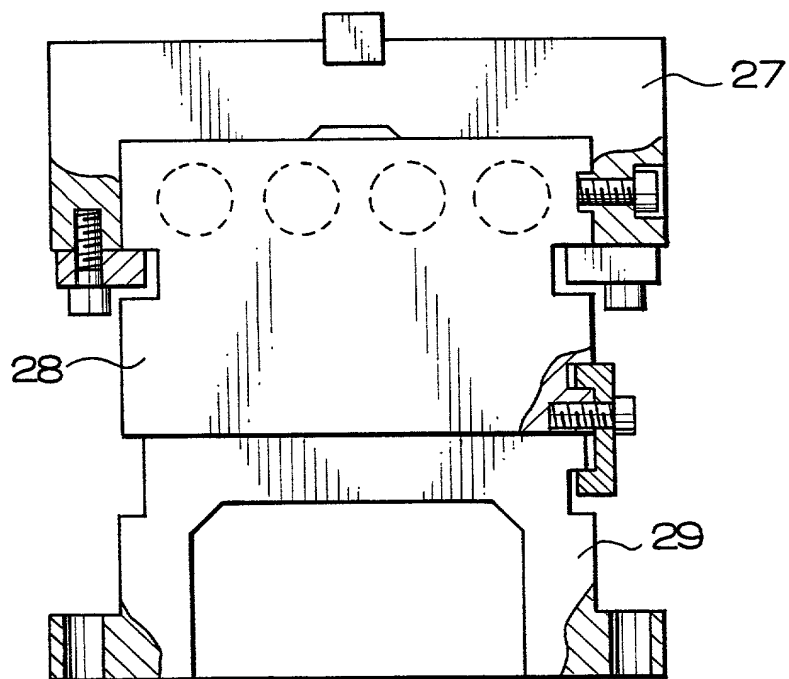

Declaration For U.S. Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled
(Insert Title) CAM SLIDER AND A CAM UNIT USING THE SAME

the specification of which is attached hereto unless the following box is checked:

☐ was filed on _____ as PCT International Application
Number _____ and was amended on _____
and/or was filed on _____ as United States Application
Number _____ and was amended on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate or PCT International Application having a filing date before that of the application(s) for which priority is claimed:

(List prior foreign applications. See note A on back of this page)	<u>10-293597</u> (Number)	<u>Japan</u> (Country)	<u>15/10/1998</u> (Day/Month/Year Filed)	Priority Claimed <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
	<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	<u> </u> (Number)	<u> </u> (Country)	<u> </u> (Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below.

<u> </u> (Application Number)	<u> </u> (Filing Date)
<u> </u> (Application Number)	<u> </u> (Filing Date)

(See Note B on back of this page)

☐ See attached list for additional prior foreign or provisional applications.

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s) or §365(c) of any PCT International application(s) designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior application(s) (U.S. or PCT) in the manner provided by the first paragraph of 35, U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

(List prior U.S. Applications or PCT International applications designating the U.S.)	<u> </u> (Application Serial No.)	<u> </u> (Filing Date)	<u> </u> (Status) (patented, pending, abandoned)
	<u> </u> (Application Serial No.)	<u> </u> (Filing Date)	<u> </u> (Status) (patented, pending, abandoned)

And I hereby appoint as principal attorneys: David T. Nikaido, Reg. No. 22,663; Charles M. Marmelstein, Reg. No. 25,895; George E. Oram, Jr., Reg. No. 27,931; Robert B. Murray, Reg. No. 22,980; Martin S. Postman, Reg. No. 18,570; E. Marcie Enas, Reg. No. 32,131; Douglas H. Goldhush, Reg. No. 33,125; Kevin C. Brown, Reg. No. 32,402; Monica Chin Kitts, Reg. No. 36,105; Richard J. Berman, Reg. No. 39,107; King L. Wong, Reg. No. 37,500; Karen K. Costantino, Reg. No. 35,107; and James A. Poulos, III, Reg. No. 31,714.

Please direct all communications to the following address: NIKAIDO, MARMELESTEIN, MURRAY & ORAM LLP
Metropolitan Square
655 Fifteenth Street, N.W., Suite 330 - G Street Lobby
Washington, D.C. 20005-5701
(202) 638-5000 Fax: (202) 638-4810

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(See Note C on back of this page)

Full name of sole or first inventor Masahiro HIGUCHI
Inventor's signature *M. Higuchi* 10/12/1999
Residence Tokyo, Japan Date
Citizenship Japan
Post Office Address 1-1-5, Nisshin-cho, Fuchu-shi, Tokyo 183-0036
Japan

Full name of second joint inventor, if any Toshiyuki YARIMIZU
Inventor's signature Toshiyuki Yarmizu 10/12/1999
Residence Tokyo, Japan Date
Citizenship Japan
Post Office Address 1-1-5, Nisshin-cho, Fuchu-shi, Tokyo 183-0036 Japan

Full name of third joint inventor, if any Shoji NEMOTO
Inventor's signature Shoji Nemoto 10/12/1999
Residence Tokyo, Japan Date
Citizenship Japan
Post Office Address 1-1-5, Nisshin-cho, Fuchu-shi, Tokyo 183-0036 Japan

Full name of fourth joint inventor, if any Masahiro SHIBATA
Inventor's signature Masahiro Shibata 10/12/1999
Residence Tokyo, Japan Date
Citizenship Japan
Post Office Address 1-1-5, Nisshin-cho, Fuchu-shi, Tokyo 183-0036 Japan

Full name of fifth joint inventor, if any _____
Inventor's signature _____ Date
Residence _____
Citizenship _____
Post Office Address _____

Full name of sixth joint inventor, if any _____
Inventor's signature _____ Date
Residence _____
Citizenship _____
Post Office Address _____

Full name of seventh joint inventor, if any _____
Inventor's signature _____ Date
Residence _____
Citizenship _____
Post Office Address _____

Full name of eighth joint inventor, if any _____
Inventor's signature _____ Date
Residence _____
Citizenship _____
Post Office Address _____

Full name of ninth joint inventor, if any _____
Inventor's signature _____ Date
Residence _____
Citizenship _____
Post Office Address _____